

GRAU


Sun Installation Track

Die lebendige Sun Installation. Sun Installation macht die Planung einer lebendigen Lichtinstallation in Treppenhäusern und Foyers einfach. 10 Ambient-Leuchtkörper aus mundgeblasenen Glas sind als Installation vorkonfektioniert.

Farben

Farben	Artikelnummer
● Black	SUS1-610-00
● Sand White	SUS1-610-05

Dimensionen

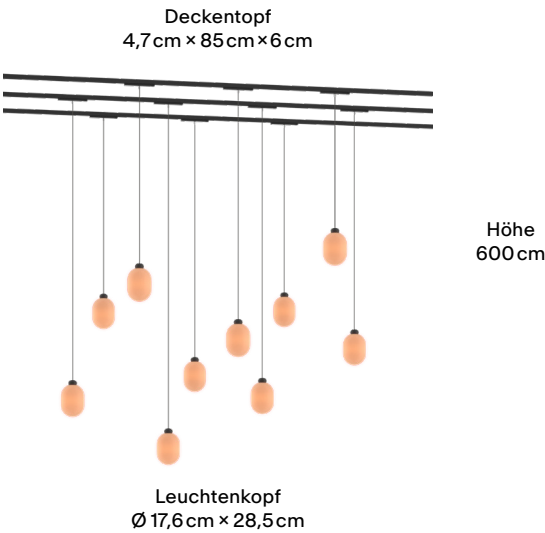


Body

Pendellänge	bis 6 m
Material	Mundgeblasenes Glas
Oberfläche	Matt
Gewicht	18 kg
Höhenverstellbar	Nein
Montageart	Track
Nennspannung	220 – 240 V
Leistungsaufnahme	10 x 14 W
Leuchteneffizienz	58 lm / W
Anschlussleitung (Ader - Zahl)	3
Schutzklasse	I
EU-Konformität	CE

GRAU

Lichtkurve

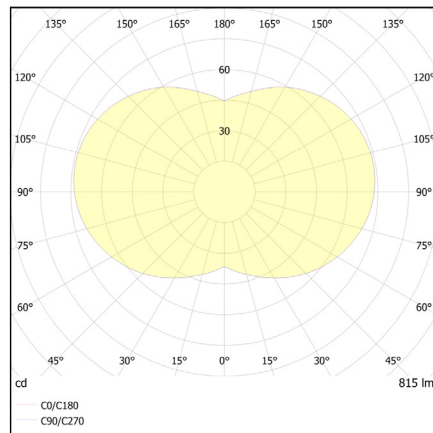

Licht

Leuchtmittel	LED
Leuchtenlichtstrom	10×815lm
Farbwiedergabeindex	CRI>90
Lichtaustritt	360°
Lichtverteilung	Symmetrisch
Farbtemperatur	2700 - 1300 K
Lichtfarbe	Warmweiß
Dimmbar	Ja
Art der Dimmung	GRAU App
Kompatibilität mit Casambi	Ja
GRAU App integriert	Ja
Sunset Dimming	Ja
Energieeffizienz (direkt)	F

GRAU

Kompatible Stromschienen

Hersteller	Typ	System
EUTRAC	25-XX-XX / 26-XX-XX	3P
iGuzzini	6771-6774	3P
iGuzzini	6779-6782	3P
IVELA	7501 / 7511 / 7512	3P
LUMISYS UNIPRO	T32 / T33 /34	3P
LUMISYS UNIPRO	T32F / T33F /34F	3P
NORDIC ALUMINIUM	GLOBAL Trac Pro XTS 4xxx	3P
NORDIC ALUMINIUM	GLOBAL Trac Pro XTSE 4xxx	3P
ZUMTOBEL	S280...	3P
ERCO	783...	3P
SIDE	25101	3P
PHILIPS	RCS350 3C	3P
FOSNOVA	OMNITRACK	3P
Stucchi	ONETRACK	3P
Powergear	PRO-0610	3P
Unipro	T32W	3P
Unipro	T32FW	3P

GRAU


Sun Installation Track

The lively Sun installation. Sun Installation makes it easy to plan a vibrant lighting installation in stairwells and foyers. 10 ambient luminaires made of hand-blown glass are prefabricated as an installation.

Colors

Color	SKU
● Black	SUS1-610-00
● Sand White	SUS1-610-05

Dimensions

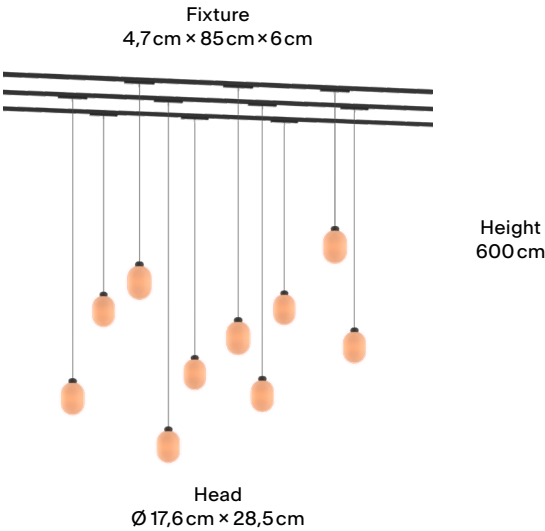


Body

Pendant length	up to 6 m
Material	Mouthblown glass
Surface	Matt
Weight	18 kg
Mounting type	Track
Height adjustable	No
Rated voltage	220 – 240 V
Power consumption	10 x 14 W
Luminaire efficiency	58 lm / W
Connection cable (number of cores)	3
Protection class	I
This Product is CE conform	CE

GRAU

Light Curve

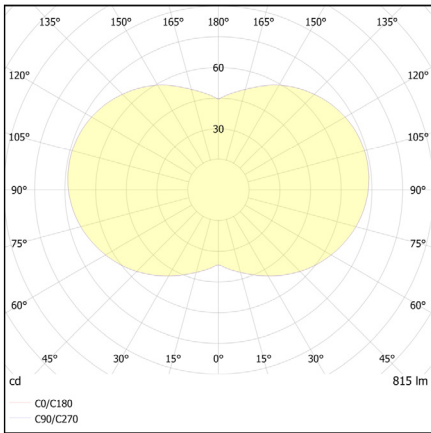

Light

Light source	LED
Luminous flux	10×815lm
Color rendering index	CRI>90
Light emission	360°
Light distribution	Symmetric
Color temperature	2700 - 1300 K
Light color	Warm White
Dimmable	Yes
Type of dimming	GRAU App
Compatibility with Casambi	Yes
GRAU App integrated	Yes
Sunset Dimming	Yes
Energy efficiency (direct light)	F

GRAU

Compatible track lighting systems

Manufacturer	Type	System
EUTRAC	25-XX-XX / 26-XX-XX	3P
iGuzzini	6771-6774	3P
iGuzzini	6779-6782	3P
IVELA	7501 / 7511 / 7512	3P
LUMISYS UNIPRO	T32 / T33 /34	3P
LUMISYS UNIPRO	T32F / T33F /34F	3P
NORDIC ALUMINIUM	GLOBAL Trac Pro XTS 4xxx	3P
NORDIC ALUMINIUM	GLOBAL Trac Pro XTSE 4xxx	3P
ZUMTOBEL	S280...	3P
ERCO	783...	3P
SIDE	25101	3P
PHILIPS	RCS350 3C	3P
FOSNOVA	OMNITRACK	3P
Stucchi	ONETRACK	3P
Powergear	PRO-0610	3P
Unipro	T32W	3P
Unipro	T32FW	3P